
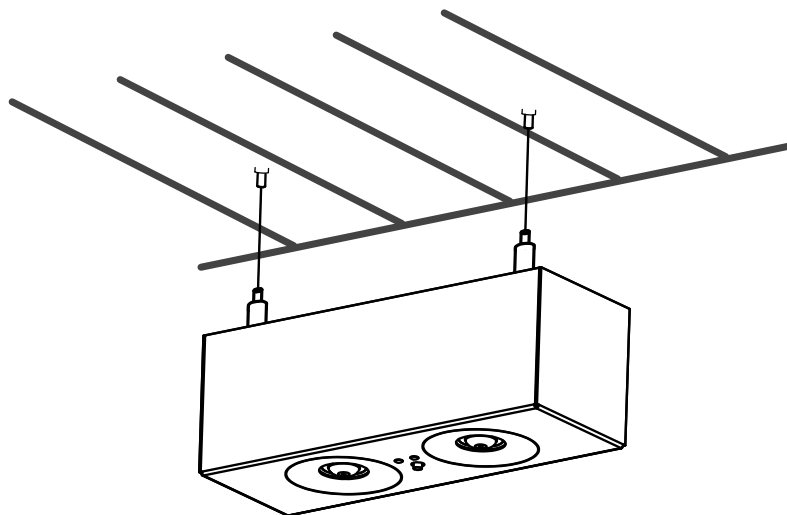


CRYSTAL C119


INSTRUKCJA MONTAŻU I OBSŁUGI **PL**

Zestaw umożliwia montaż oprawy CRYSTAL LED do sufitu na stalowych zawieszach linkowych (elementy zamawiane osobno – zestaw UMK C113).

ELEMENTY ZESTAWU

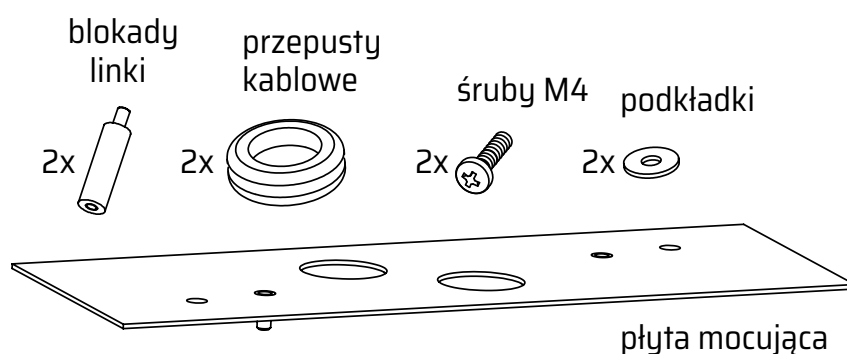


WYMIARY

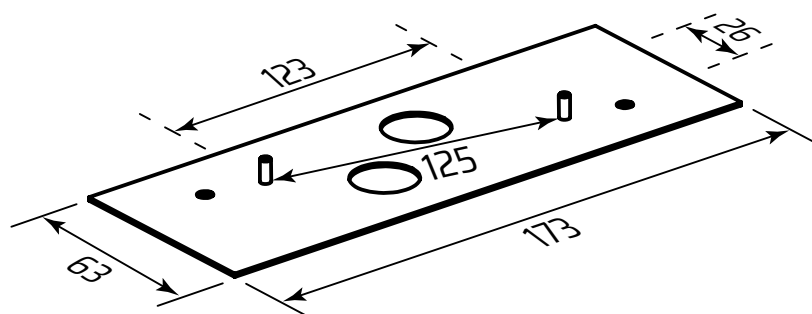


Należy stosować się do wymagań i zaleceń bezpieczeństwa zawartych w instrukcji montażu oprawy CRYSTAL LED

INSTALACJA

1. Rozpakować oprawę i zestaw montażowy oraz zweryfikować ich stan po transporcie.
2. Wywiercić w suficie dwa otwory (patrz WYMARY) pod elementy z zestawu mocowania UMK C113 (linka stalowa oraz uchwyty stropowe).
3. Otworzyć oprawę zgodnie z jej instrukcją obsługi.
4. Założyć przepusty kablowe w otworach płyty mocującej, następnie wykonać montaż płyty, użyć do tego celu podkładek i śrub, dostarczonych w komplecie zestawu mocowania.

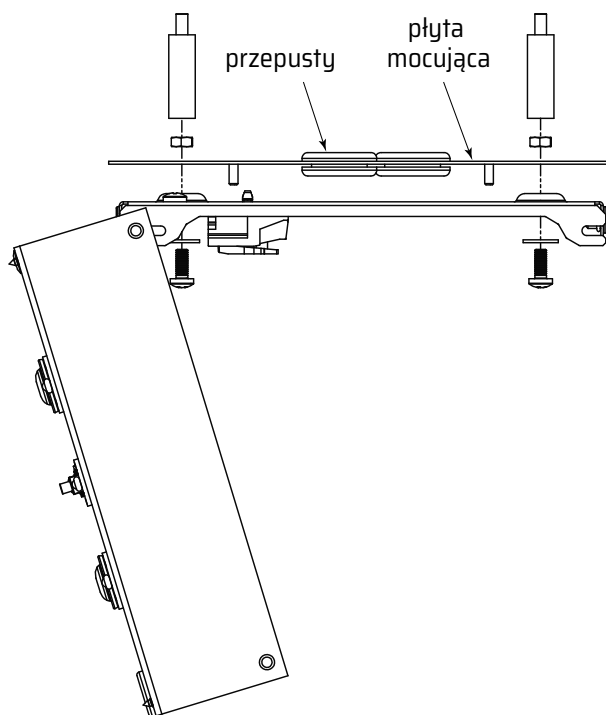

5. Przełożyć przewody zasilające przez przepusty kablowe znajdujące się w płycie mocującej, podłączyć przewody zasilania do złącza sieciowego. Schemat podłączenia przewodów zasilania oprawy przedstawiony został w instrukcji obsługi oprawy.
6. Zamknąć oprawę.
7. Wykonać montaż linek w uchwytach blokady linki.

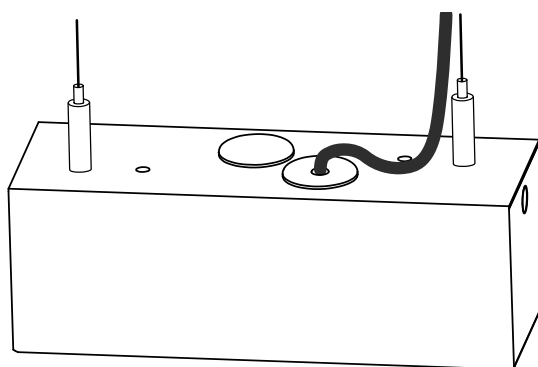

8. Wykorzystując elementy UMK C113 wykonać montaż oprawy do sufitu.
- UWAGA: Jeżeli stosujemy własne elementy, linka powinna mieć średnicę 1,2 mm.
9. Wykonać procedurę uruchomienia zgodnie z instrukcją oprawy.


GWARANCJA

Gwarancja na wyrób obowiązuje pod warunkiem przestrzegania zaleceń i wskazówek producenta oraz użytkowania produktu zgodnie z przeznaczeniem, na okres 12 miesięcy licząc od daty sprzedaży, chyba że wyrób sprzedany został w ramach kontraktu i ten stanowi inaczej. Gwarancja nie obejmuje usterek mechanicznych powstałych z winy klienta, a także usterek wynikłych na skutek złego podłączenia bądź użytkowania wyrobu.

CRYSTAL C119




INSTALLATION MANUAL **EN**

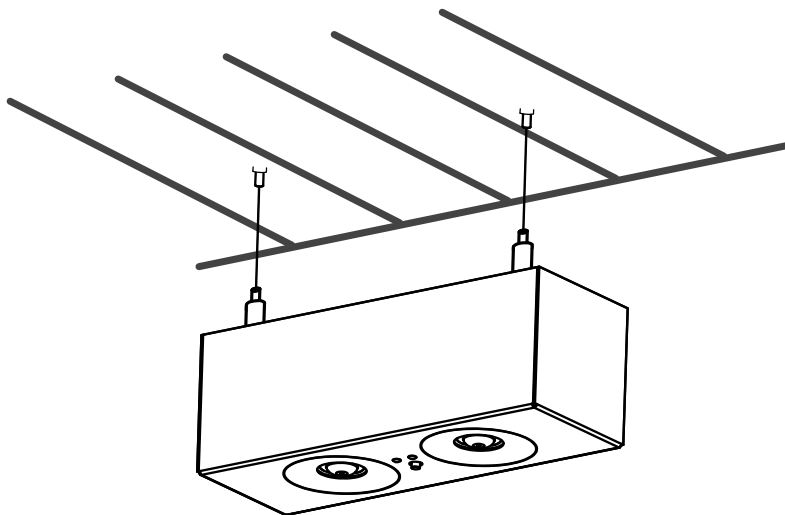


Mounting accessory is used to mount CRYSTAL LED luminaires suspended on the wire rope slings to the ceiling (the components must be ordered separately - UMK C113 mounting kit).

MOUNTING KIT CONTENTS

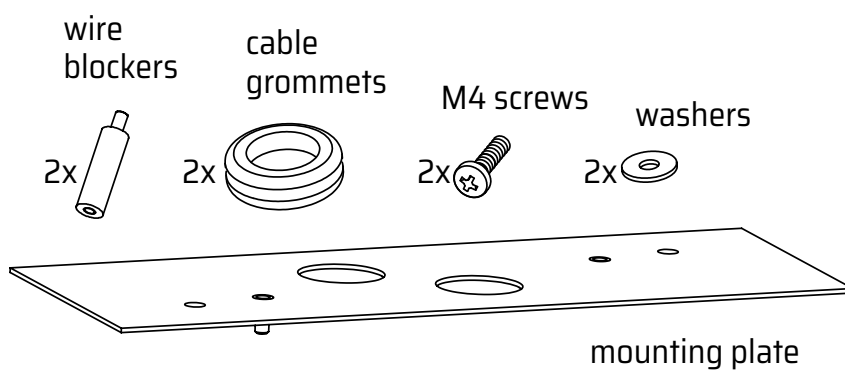


DIMENSIONS

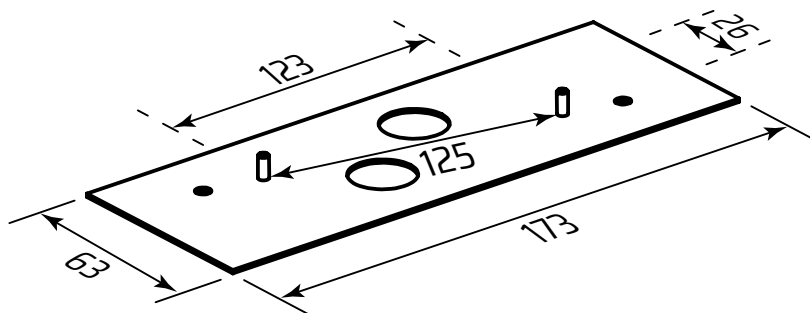


Follow the **SAFETY** included in the CRYSTAL LED luminaire installation manual

INSTALLATION

1. Unpack the luminaire and mounting kit after transport and verify their condition.
2. Drill two holes in the ceiling (see DIMENSIONS) for the elements from the UMK C113 (steel rope and ceiling brackets).
3. Open the luminaire according to its installation manual.
4. Insert the rubber grommets in the plate holes, and then install the mounting plate, using the washers and screws provided with the set.

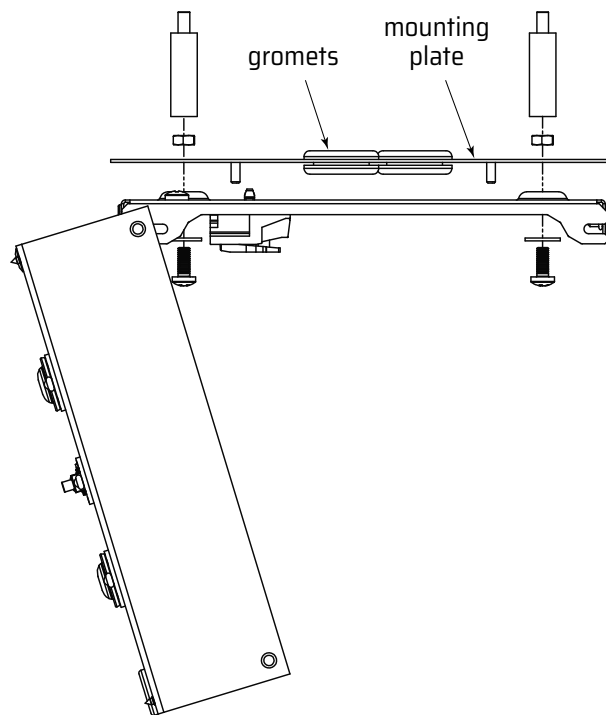

5. Pass the power cords through the rubber gromets located in the C119 mounting plate, and connect to the power connector. Wiring diagram of the power cables connection is presented in the luminaire installation manual.
6. Close the luminaire.
7. Install the steel ropes in the wire blockers.

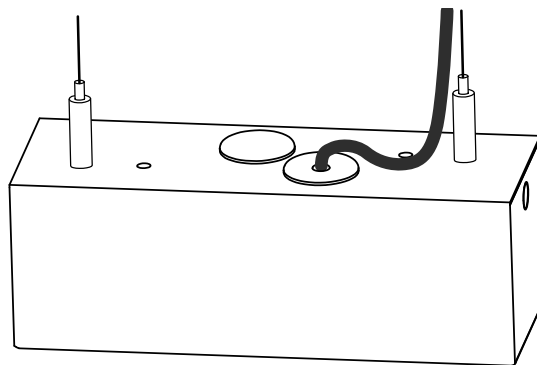

8. Using the elements of UMK C113, mount the luminaire to the ceiling.

NOTE: If you use your own elements, the rope should have a diameter of 1.2 mm.

9. Perform the commissioning procedure described in luminaire installation manual.

WARRANTY

Warranty is valid and enforceable only when manufacturer's recommendations are preserved and the installation and usage are proper. Warranty is granted for a period of 12 months from the date of sale, unless the product has been sold under different contract conditions. The warranty is excluded in case of misuse, unsuitable use, wrong connection or mechanical defects of the product caused by the client.