
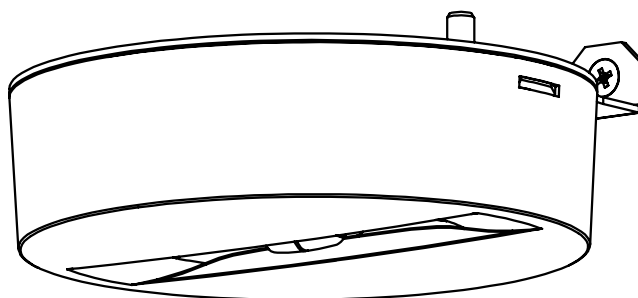


OWA SU LED W170

INSTRUKCJA MONTAŻU **PL**

Zestaw umożliwia montaż oprawy OWA SU LED bokiem do ściany przy pomocy dedykowanego kątownika.


ELEMENTY MOCOWANIA

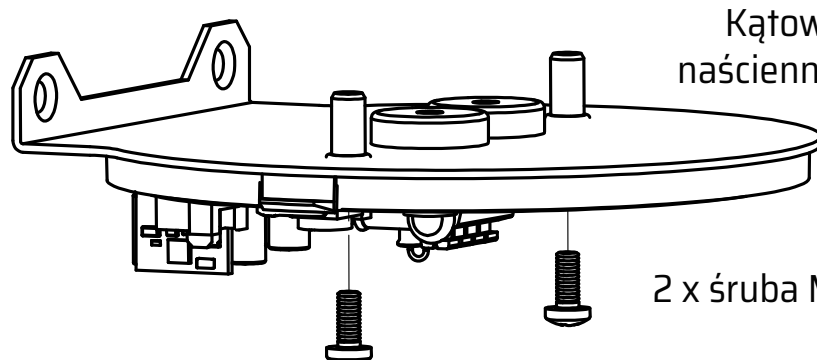

Kątownik mocowania
naściennego z przepustami

2 x śruba M4


WYMIARY

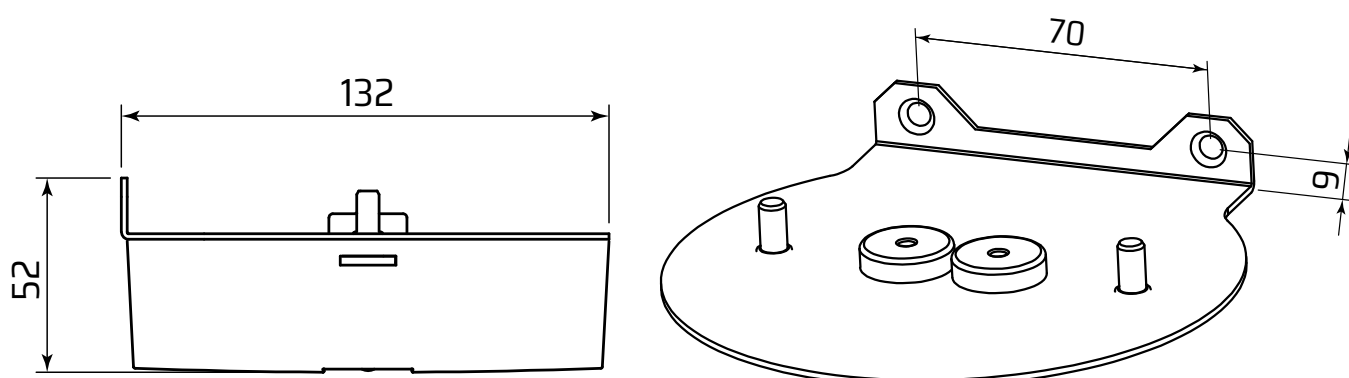


Należy stosować się do wymagań i zaleceń bezpieczeństwa zawartych w instrukcji montażu oprawy

INSTALACJA


1. Rozpakować zestaw mocowania i oprawę. Zweryfikować ich stan po transporcie.
2. Zamontować w kątowniku mocowania dwa przepusty kablowe.
3. Wywiercić otwory w ścianie pod kątownik mocowania zgodnie z rozstawem otworów montażowych (patrz WYMIARY). Należy stosować kołki rozporowe oraz wkręty odpowiednie dla podłoża, do którego montowana jest oprawa.
4. W celu uszczelnienia w rowkach podstawy oprawy nanieść silikon neutralny.

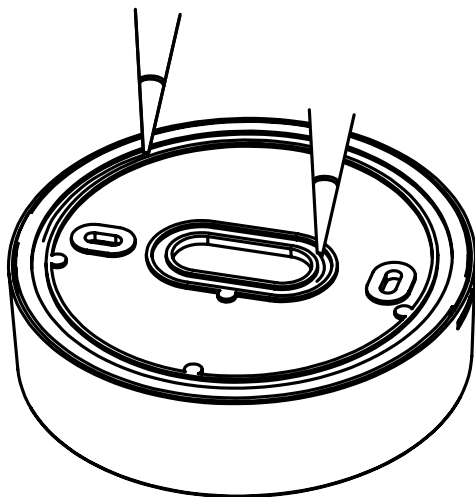

5. Złożyć mocowanie razem z podstawą i wkręcić śruby M4 w otwory montażowe mocowania W170. Zalać łby śrub silikonem neutralnym.

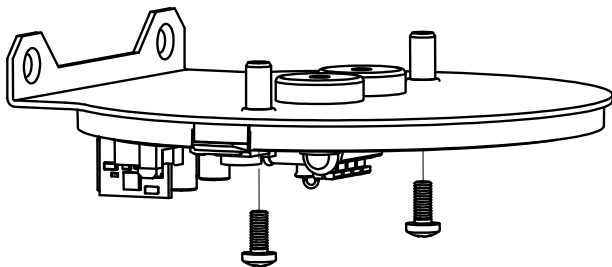

6. Przełożyć przewody zasilające (oraz komunikacyjne dla wykonania CT) przez przepusty kablowe w płycie mocowania. Przykręcić złożony zestaw mocowania wraz z podstawą oprawy do ściany.

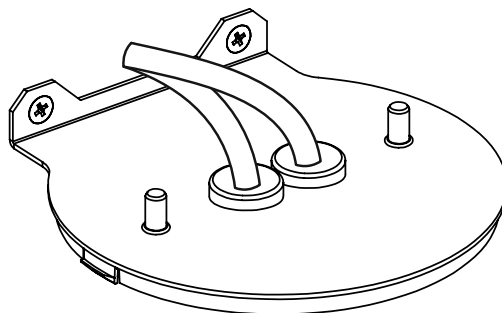

7. Kolejne czynności wykonywać zgodnie z instrukcją oprawy.


GWARANCJA

Gwarancja na wyrób obowiązuje pod warunkiem przestrzegania zaleceń i wskazówek producenta oraz użytkowania produktu zgodnie z przeznaczeniem, na okres 12 miesięcy licząc od daty sprzedaży, chyba że wyrób sprzedany został w ramach kontraktu i ten stanowi inaczej. Gwarancja nie obejmuje usterek mechanicznych powstałych z winy klienta, a także usterek wynikłych na skutek złego podłączenia bądź użytkowania produktu.

OWA SU LED W170




INSTALLATION MANUAL **EN**

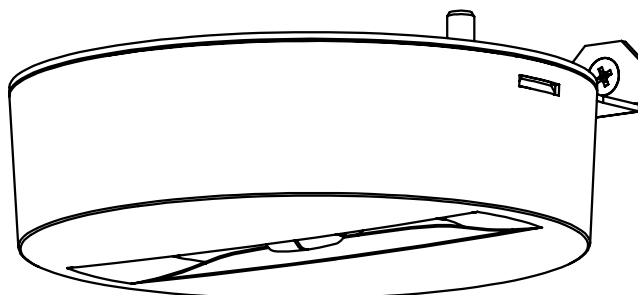


The mounting kit is use to mount the OWA SU LED luminaire sideways to the wall with a dedicated component.

MOUNTING KIT CONTENTS

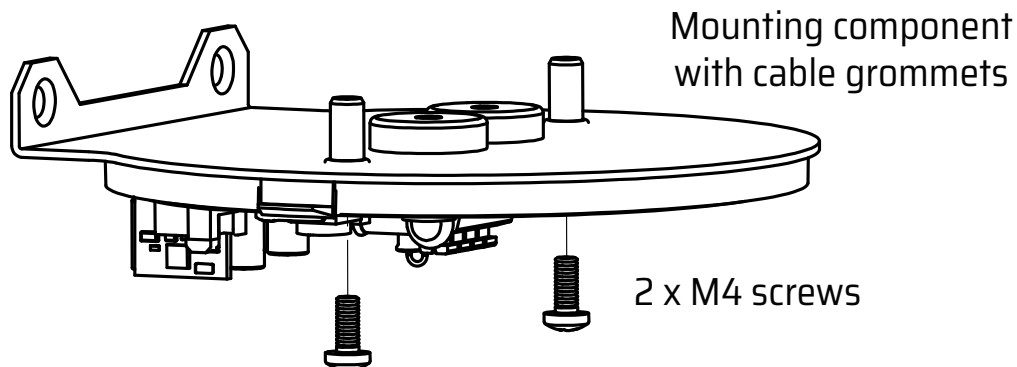


DIMENSIONS

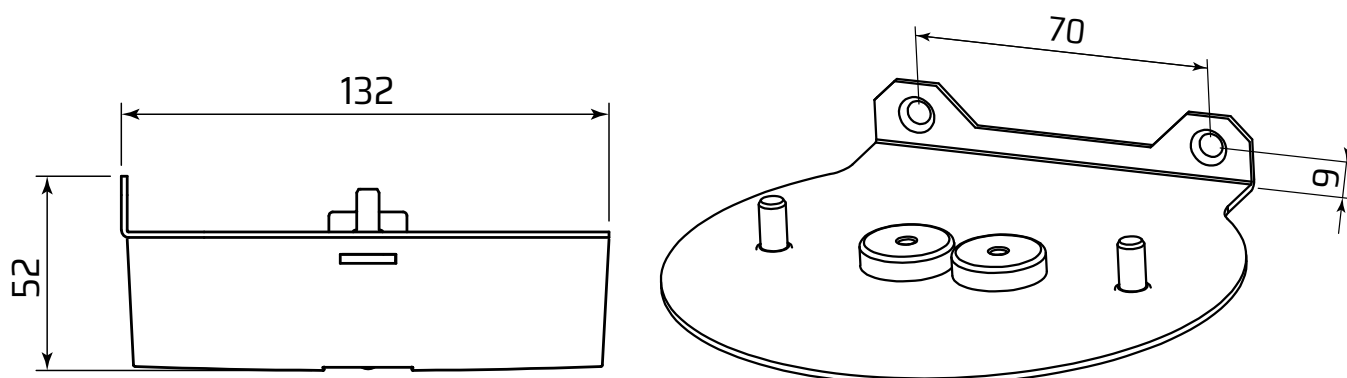


Follow the **SAFETY** included in the OWA SU LED luminaire installation manual

INSTALLATION


1. Unpack the luminaire and mounting kit after transport and verify their condition.
2. Install two cable grommets in the mounting component.
3. Drill two holes in the wall according to the spacing of the mounting holes. Use dowels and screws, suitable for the base to which the luminaire is mounted.
4. In order to seal apply neutral silicone in the housing base grooves.

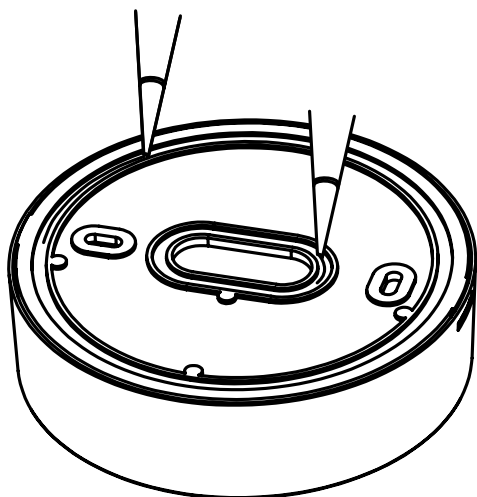

5. Connect the kit together with the luminaire base and screw the M4 screws into the holes of the mounting plate. Fill the bolt heads with neutral silicone.

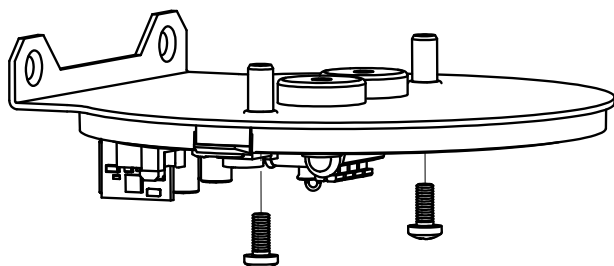

6. Pass the power cables (and communication cables for the CT version) through the cable grommets in the mounting plate. Screw the assembled kit together with the luminaire base to the wall.

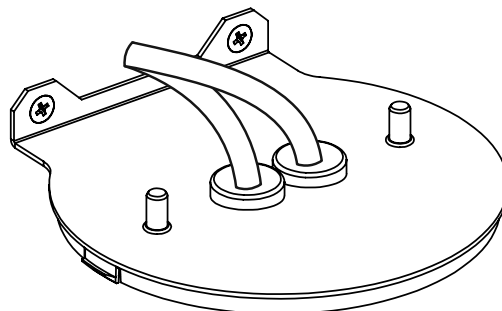

7. Perform the next steps in accordance with the luminaire installation manual.

WARRANTY

Warranty is valid and enforceable only when manufacturer's recommendations are preserved and the installation and usage are proper. Warranty is granted for a period of 12 months from the date of sale, unless the product has been sold under different contract conditions. The warranty is excluded in case of misuse, unsuitable use, wrong connection or mechanical defects of the product caused by the client.